
motorization solutions for gates




Blanco is the leader in spain and in Europe for access automation systems



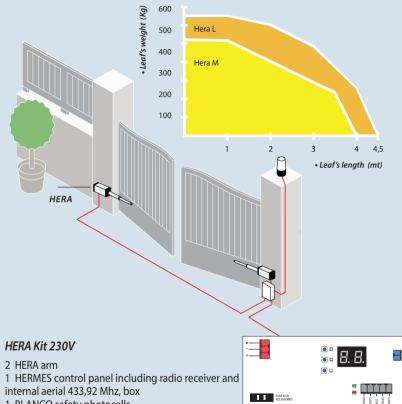

1 BLANCO safety photocells

- 2 ORANGE release key
- 1 BLANCO blinker 220Vac
- 2 BLANCO RAINBOW transmitters -4channels Fixing brackets and instructions





- Robustness: for leaf up to 400Kg ang 4m in residential or commercial.
 Self learning programming system: autoregulation of speed and torque
- in relation with the gate weight
 The main settings of the units are learnt automatically: automatic regulation of power and speed, motor time and brake.
- Mechanical declutching system to open the gate with hand.
- Simple programming interface: code instant on a 2 digit LCD

TECHNICAL CHARACTERISTICS HERA L

Letimere chrinkerenisties	
Motor power supply	230 V ± 50 %10 Hz
Power consumption	380 W
Capacitor	6.3 μF
Absorbed current	1.7 A
Push and pull force	3,000 N (~300 kg)
Working stroke	400 mm
Revolution speed	1400 g/m
Max no. of operations/day	60
Max. leaf length without electric lock	3,000 mm
Max. leaf length with electric lock	4,000 mm
Max. leaf weight	400 kg
Operating temperature	-20 °C to +55 °C
Protection factor	IP 54



Offices



Industry



Residential

www.blancoiran.ir



LET'S YOUR FINGER CONTROL YOUR HOME STRONGLY !

